

# CASE

CONSTRUCTION

## SKID STEER LOADERS

SR130 | SR150 | SR175 | SV185 | SR200 | SR220 | SR250  
SV250 | SV300



PRELIMINARY

# SKID STEER LOADERS

SR130 | SR150 | SR175 | SV185 | SR200 | SR220 | SR250 | SV250 | SV300


## A tough new team

Case skid steers have always been known for power and productivity. Now with nine new skid steers, we've outdone ourselves – and the competition. "Bullet proof" sums it up. Our new lineup of skid steers delivers industry-leading bucket breakout force (up to 3894 kg) and hinge-pin height. Plus, best-in-class horsepower model by model. By any measure, the new Case skid steers will boost your performance and productivity.

## We've got the power

Whatever your job, Case has a skid steer that can handle it. From our newest model, the 590 kg capacity SR130, to the powerful 1360 kg SV300\*, we've got the muscle to get the job done. Our radial lift (SR) models are engineered for digging, prying and pushing, while our vertical lift (SV) models are for lift-and-carry jobs.

\* 3200 ROC with counterweights

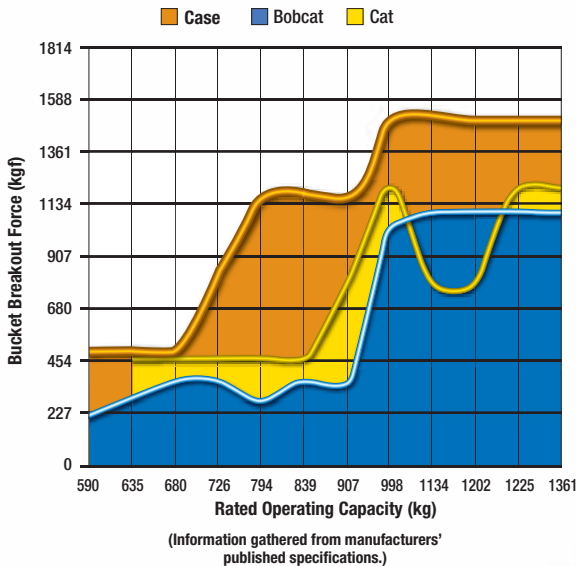

Compare us to the competition. You'll feel the superior breakout force.



## Love where you work

Climb in a new cab and you'll feel the difference. We know your cab is your workplace, so we designed an operating environment that delivers more room, visibility, comfort and control. We also sealed the cab to significantly reduce the amount of noise and dust.

Our new cabs are also 25 percent larger – the widest in the industry. They feature a revolutionary ultra-narrow wire side-screen design with more glass surface area to provide 360-degree visibility. Add Case-exclusive side lighting, and you can get more done – day or night.

Your operators will be comfortable in the industry's widest cab.



## Break-through engineering


With the Case skid steer lineup, you can choose between standard mechanical drives and optional electro-hydraulic (EH) switchable controls. With the EH option, you can match control patterns to operator preference.

Case engineers also developed our new Power Stance chassis with up to 21 percent longer wheelbase and 30/70 front/rear weight distribution. Why? To lift and haul more material. Combined with Ride Control, our skid steers provide superior stability and operating speeds, regardless of jobsite conditions.

Plus, here's one more advantage: the new Case skid steers will run all day without refueling, thanks to improved fuel efficiency and new 60.5- to 96.5-lt. fuel tanks.



With a quick-coupler, you can switch attachments without leaving the cab.

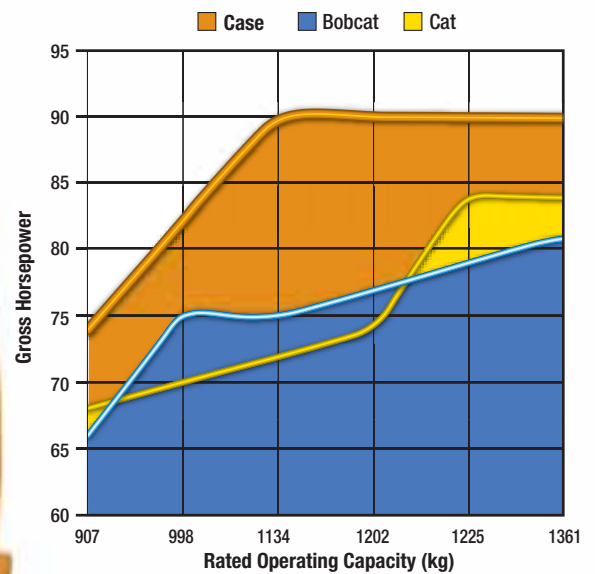

(Information gathered from manufacturers' published specifications.)

**You get more horsepower with Case.**

SPECIFICATIONS	SR130	SR150	SR175	SV185	SR200	SR220
<b>Engine</b>	ISM 420/M3	ISM 420T/M3	ISM 422T/M3	ISM 422T/M3	Case 432T/M3	Case 432T/M3
Gross	46 hp (34 kW) @ 2900 rpm	52 hp (39 kW) @ 2900 rpm	60 hp (45 kW) @ 2900 rpm	60 hp (45 kW) @ 2900 rpm	74 hp (55 kW) @ 2500 rpm	82 hp (61 kW) @ 2500 rpm
Net	43 hp (32 kW) @ 2900 rpm	49 hp (36 kW) @ 2900 rpm	57 hp (42 kW) @ 2900 rpm	57 hp (42 kW) @ 2900 rpm	70 hp (52 kW) @ 2500 rpm	76 hp (57 kW) @ 2500 rpm
Peak torque	130.5 Nm @1750 rpm	148 Nm @ 1750 rpm	171 Nm @ 1800 rpm	171 Nm @ 1800 rpm	275 Nm @ 1400 rpm	305 Nm @ 1400 rpm
Displacement – L	2.0	2.0	2.2	2.2	3.2	3.2
<b>Rated operating capacity*</b>						
50% – kg	590	680	790	840	905	1000
<b>Tipping load – kg</b>	1179	1374	1588	1678	1814	2000
<b>Breakout force</b>						
Bucket cylinder – kN	18.5	18.5	31.8	24.2	31.8	38.2
<b>Operating weight – kg</b>	2270	2400	2812	2950	3130	3350

SPECIFICATIONS	SR250	SV250	SV300
<b>Engine</b>	Case 432T/M3	Case 432T/M3	Case 432T/M3
Gross	90 hp (67 kW) @ 2500 rpm	82 hp (61 kW) @ 2500 rpm	90 hp (67 kW) @ 2500 rpm
Net	84 hp (63 kW) @ 2500 rpm	76 hp (57 kW) @ 2500 rpm	84 hp (63 kW) @ 2500 rpm
Peak torque	340 Nm @ 1400 rpm	305 Nm @ 1400 rpm	340 Nm @ 1400 rpm
Displacement – L	3.2	3.2	3.2
<b>Rated operating capacity*</b>			
50% – kg	1135	1135	1360
<b>Tipping load – kg</b>	2270	2270	2720
<b>Breakout force</b>			
Bucket cylinder – kN	38.2	38.2	38.2
<b>Operating weight – kg</b>	3490	3630	3765

\* Rated without counterweights.

Standard and optional equipment shown can vary by country.

**Worldwide Case Construction Equipment Contact Information**

**EUROPE:**

via Plava, 80  
10135 TORINO - ITALIA

**AFRICA/MIDDLE EAST/CIS:**

Riva Paradiso 14  
6902 Paradiso - SWITZERLAND

**NORTH AMERICA/MEXICO:**

700 State Street  
Racine, WI 53404 U.S.A.

**LATIN AMERICA:**

Av. General David Sarnoff 2237  
32210 - 900 Contagem - MG  
Belo Horizonte BRAZIL

**ASIA PACIFIC:**

Unit 1 - 1 Foundation Place - Prospect  
New South Wales - 2148 AUSTRALIA

**CHINA:**

No. 29, Industrial Premises, No. 376,  
De Bao Road, Waigaoqiao Ftz, Pudong,  
SHANGHAI, 200131, P.R.C.

**CASE Construction Equipment**

CNH UK Ltd  
Unit 4,  
Hayfield Lane Business Park,  
Field Lane, Auckland,  
Doncaster,  
DN9 3FL  
Tel. 00800-2273-7373  
Fax +44 1302 802829


**CASE Customer Assistance**  
**00800-2273-7373**

The call is free from a land line. Check in advance with your Mobile Operator if you will be charged.

**Best-in-class serviceability**

Ask your technicians. Case has a reputation for easy-to-maintain and service equipment.

The new Case skid steers are no exception. The new design dominates the industry's top SAE serviceability rankings with features such as easy, ground-line access for daily maintenance checks.

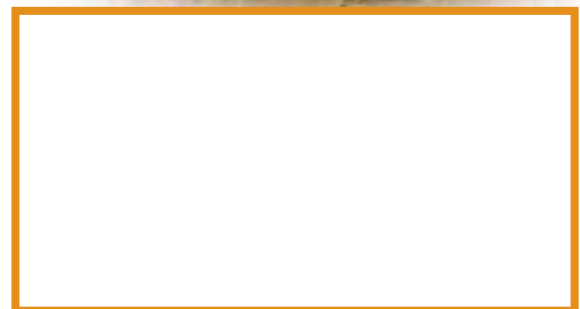

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 98/37/CE



Test it at the CASE Customer Centre Paris!

[www.casece.com](http://www.casece.com)



Form No. 20004GB - Printed in Italy - MediaCross Firenze - 02/11